

primus

Rigid Mounted Industrial Washer Extractor RS 35



FEATURES

- Rigid mounted, medium spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Large drain valves (2x75 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Standard liquid soap connections
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption


OPTIONS

- Full control (FC) microprocessor
- Liquid soap pumps
- Soft wash version (wet cleaning)
- Coin operated timer
- Anti-vandalism fascia panel
- Water recovery kit
- LPMS networking software

liqui-mix®

POWERWASH®

TYPE		RS 35
CAPACITY		
Drum volume	l	335
Capacity	kg	35
Drum dimensions	mm	914 x 505
MOTOR		
Frequency controlled		standard
DRUM SPEED		
Wash speed	rpm	41
Spin speed	rpm	510
G-factor spin speed		133
PROGRAMMER		
EC microprocessor		standard
FC microprocessor		+
CABINET		
Stainless steel AISI 304		standard
FIXING		
		yes
HEATING		
100% hot water	°C	90
	°F	194
100% electrical 380-400V	kW	18-24
Steam high pressure	bar	3-7
CONNECTION		
Electrical 220-240V		AC+N/50-60Hz
Electrical 380-400V		3AC+N/50-60Hz
Water inlet	inch	3/4"
Steam inlet	inch	3/4"
DIMENSIONS		
HxWxD	mm	1460x1100x1140
TRANSPORT DATA		
Gross weight		
Case packing	kg	810
Net weight	kg	760
Volume (packed)		
Case packing	m ³	2,24
Case packing HxWxD	mm	1630x1150x1200
+ = Available		
Standard = Standard version		

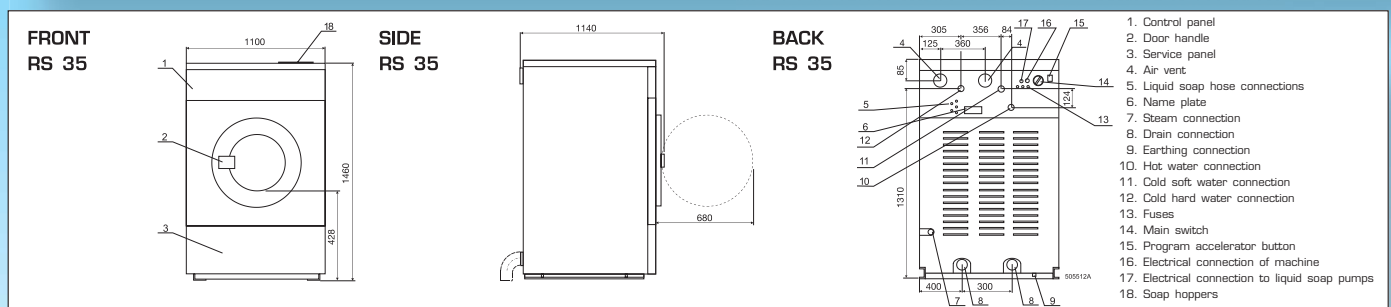

The company Primus bvba preserves the right to change the machines and the specifications in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality without compromise

